



About



Infinet Wireless

The world's leading developer and manufacturer of Broadband Wireless Access solutions which are used to create carriergrade wireless backbones and access networks for service providers.















More than 500,000 deployments in over 130 countries

2,300 square meters of own production facilities

180 employees 30 offices around the world, in the strategically important countries

100+ major distributors all over the world

Modern Communication Facilities Help to Accomplish the Following




Extraction

Transportation

Processing

Distribution



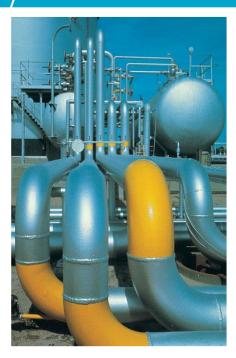





Applications



Extraction

Organisation of

Transportation

Processing

Distribution

- Point-to-Point solutions for backbone connections between production fields.
- Point-to-Multipoint solutions for data acquisition from multiple-well platforms to enable remote control systems.
- Point-to-Point solutions for connectivity between offshore platforms.

Organisation of communication links provides solutions for:

- Systems of linear telemetry and remote control. Location – block valve sites.
- Fiscal Metering
 Systems. Location –
 metering stations.
- Leak detection systems.
- Cathodic protection systems.
- Security systems (video surveillance and security alarm system).


Connection of remote subdivisions:

 Connection to the corporate data transfer network (triple play service: data transfer, IPtelephony, video surveillance). Last mile connectivity for fuel filling stations:

- Online custody transfer metering, connection of pointof-sale devices and ATMs.
- Organization of video surveillance systems.
- VoIP, Wi-Fi Internet access for customers.

Communication Links Between Offshore Platforms



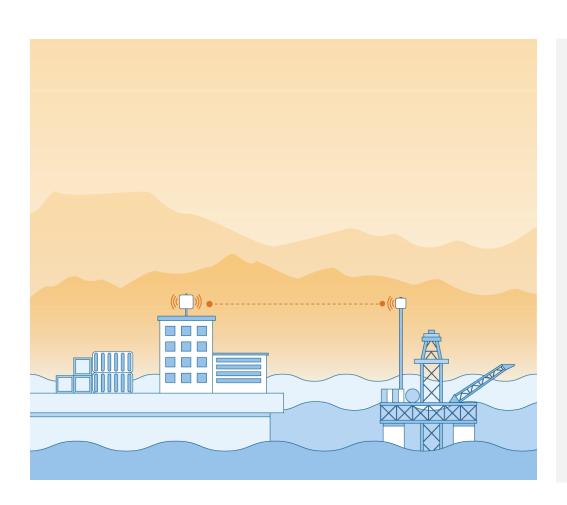


Applications

- Over-the-water communication links to remote offshore platforms at distances of more than 50 km.
- Transmission of voice, video, telemetry and data streams.

Connections Between Production Fields



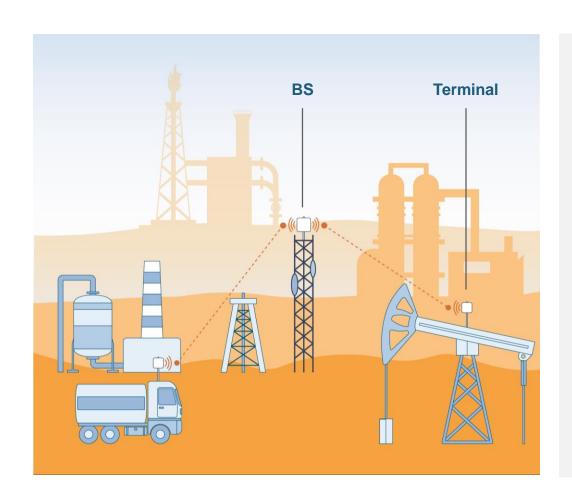


Applications

- Backbone for telemetry data acquisition from remote production fields.
- Also allows transmission of real-time HD video streams.
- Distances between monitoring centers and production fields sometimes exceeds 35 km for PtMP topologies.
- Robust solutions, working in the most severe climates.

Connection of Telemetry Sensors



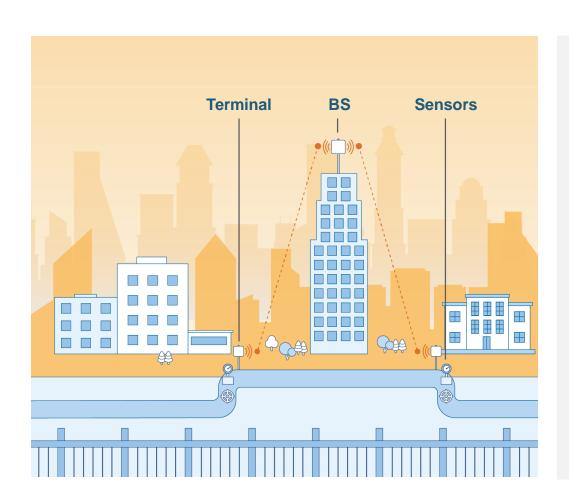

Applications

- Telemetry data acquisition from sensors and other devices.
- Distances between backbone and data acquisition sensors can be over 15 km.
- Real-time data transmission for CCTV network.
- Backbone for data transfer to the network control center.

Infinet Wireless Solutions






A complete range of wireless solutions for both PtP and PtMP fixed wireless deployments

Point-to-Point Wireless Solution

- 1 Real throughput up to 1 Gbps
- Single hop distance 200+ km High-gain external antennas
- 3 Unlimited number of hops

- 4 Full QoS support
- 5 LOS/nLOS/NLOS connectivity
- 6 Flexible frequency planning

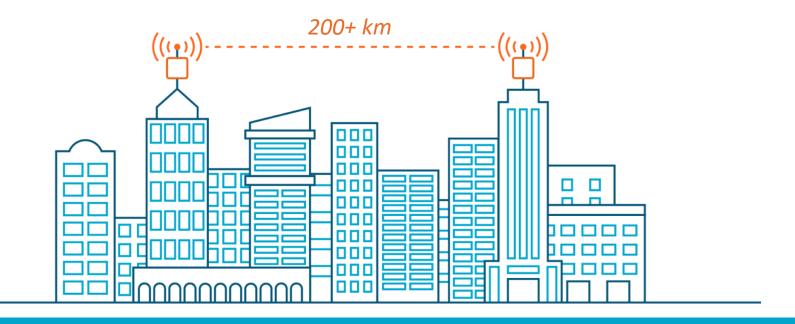

Quanta 5 & Quanta 6 – high-powered spectral efficient PtP solutions

- Outstanding performance in high interference environments
- Consume 30% less spectrum for the same capacity
- Transmit power in a top-speed mode is 6 dB higher than other solutions

Quanta 5 & Quanta 6 help to build a high capacity last mile or a backhaul in a noisy environment.





Quanta 70 – interference-less last mile access

- Advanced radio signal processing algorithms ensure the wireless link robustness to precipitation
- Extremely accurate and easy adjustment on azimuth and elevation thanks to precision mounting kit and RSSI indicator
- 3 Small form factor model allows low visual impact deployments

Quanta 70 has been designed for the last mile access and "light" trunk channels in the 70.5–76 GHz frequency range with the throughput of up to 480 Mbps.





InfiLINK Evolution – next generation system for last mile access

- 1 Works in 4.9–6.4 GHz frequency bands
- Thanks to a built-in firewall and rich security features, traffic safety is under control
- 3 Create expert-level network design with advanced switching and routing features

InfiLINK Evolution allows building stable high-capacity last mile access in 4.9–6.4 GHz bands. It comes with network router functionality, security features, traffic shaping and prioritization.



Infinet Wireless Point-to-Point Portfolio at a Glance







Product Family	Key Features	Frequency Bands
InfiLINK XG 1000	 Transmit power up to 25 dBm Net throughput up to 1 Gbps 2xGigabit Ethernet & SFP interfaces TDD sync 	• 5 GHz
Quanta 5 & Quanta 6	 Transmit power up to 27 dBm Net throughput up to 650 Mbps Gigabit Ethernet & SFP interfaces 	5 GHz6 GHz
Quanta 70	 Transmit power up to 11 dBm Net throughput up to 480 Mbps Gigabit Ethernet & SFP interfaces 	• 70 GHz
InfiLINK Evolution	 Transmit power up to 25 dBm Net throughput up to 670 Mbps Gigabit Ethernet interface 	5 GHz6 GHz

InfiLINK XG 1000 Product Portfolio



	Xm			Um
Models				
5 GHz	23 dBi 25 dBm	26 dBi 25 dBm	28 dBi 25 dBm	2x type-N 25 dBm
Capacity	QAM16: up to 370 Mbps; QAM64: up to 630 Mbps; QAM256: up to 1000 Mbps			
Channel Widths	2x10/2x20/2x40 MHz			
Duplex Modes	TDD Hybrid FDD			
TDD Sync	Via built-in or external (ANT-SYNC) GPS receiver			
Ethernet	2x Gigabit Ethernet, SFP interface			
Distance	10–20 km (max 25 km)	12-30 km (max 40 km)	15–40 km (max 50 km)	60+ km

Quanta 5 & Quanta 6 Product Portfolio







	Q5-18 Q6-18	Q5-23	Q5-25 Q6-25	Q5-28 Q6-28	Q5-E Q6-E
Models					
5 GHz	18 dBi 27 dBm	23 dBi 27 dBm	25 dBi 27 dBm	28 dBi 27 dBm	2x type-N 27 dBm
6 GHz	18 dBi 27 dBm		25 dBi 27 dBm	28 dBi 27 dBm	2x type-N 27 dBm
Capacity	650 Mbps				
Instant DFS	Supported, 5 GHz only				
Channel Widths	3.5/5/7/10/14/15/20/28/30/40/50/56 MHz				
Duplex Modes	TDD, Hybrid FDD (5 GHz only)				
Network Functionality	VLAN, QoS				
Ethernet	1x Gigabit Ethernet Combo: 1xGE(RJ45), 1xSFP				
Distance	Up to 20 km	Up to 40 km	Up to 60 km	Up to 80 km	200+ km

Quanta 70 Product Portfolio







	Q70-39	Q70-50	
Models			
Frequency range	70.5–7	'6 GHz	
Antenna gain Transmit power	39 dBi 11 dBm 50 dBi 11 dBm		
Capacity	480 Mbps		
Channel Widths	125 MHz		
Duplex Mode	TDD		
Interference Mitigation Techniques	ARQ		
Network Functionality	VLAN, QoS		
Ethernet	Combo: 1x Gigabit Ethernet port (RJ45), 1x SFP		
Distance	Up to 10 km Up to 20 km		

InfiLINK Evolution Product Portfolio



	E5-ST18 E6-ST18	E5-ST23	E5-ST25 E6-ST25	E5-ST28 E6-ST28	E5-STE E6-STE
Models					
5 GHz	18 dBi 25 dBm	23 dBi 25 dBm	25 dBi 25 dBm	28 dBi 25 dBm	2x type-N 25 dBm
6 GHz	18 dBi 25 dBm		25 dBi 25 dBm	28 dBi 25 dBm	2x type-N 25 dBm
Capacity			670 Mbps		
Channel Widths			20/40/80 MHz		
Duplex Modes			TDD		
Interference Mitigation Techniques			ARQ		
Network Functionality			VLAN, QoS		
Ethernet			1x Gigabit Ethernet		
Distance	Up to 10 km	Up to 15 km	Up to 20 km	Up to 30 km	40+ km


^{*} Roadmap item

Point-to-Multipoint Wireless Solution



- 1 BS sector coverage: up to 40 km
- Sector Capacity: up to 800 Mbps
- 3 Subscriber terminal capacity: in excess of 670 Mbps
- 4 TDD synchronization and frequency reuse

- QoS support
- Sophisticated L2/L3/L4 networking functionality
- 7 Interference mitigation tools

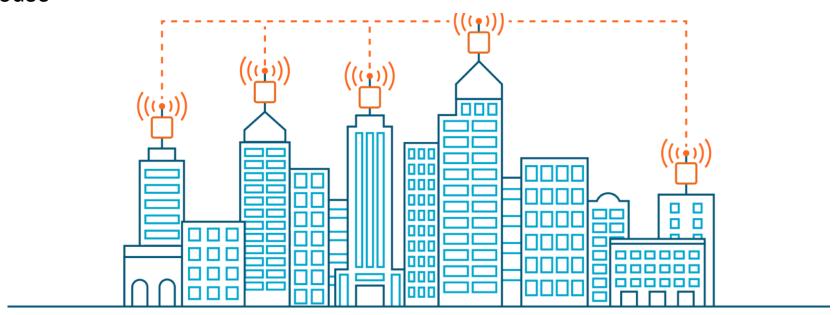

InfiMAN Evolution – highly secured next-generation PtMP solution

- Subscriber terminals work in 4.9–6.4 GHz frequency bands
- Thanks to a built-in firewall and rich security features, traffic safety is under control
- 3 Value for money thanks to advanced switching and routing features
- 4 Compatible with base station sectors and subscriber terminals of the previous generation
- 5 Cost-effective base station for low-density sectors

InfiMAN Evolution allows to build stable high-capacity connectivity in 4.9–6.4 GHz bands. It comes with rich network router functionality, security features, traffic shaping and prioritization.



Base Station Sectors InfiMAN Evolution at a Glance







Product Family	Key Features	Key Features
InfiMAN Evolution E-BSI	 Integrated 90 deg sector antenna Sector throughput up to 800 Mbps Gigabit Ethernet interface & SFP & SYNC 	5 GHz6 GHz
InfiMAN Evolution E-BSI-L	 Integrated 90 deg sector antenna Sector throughput up to 360 Mbps Gigabit Ethernet interface & SFP & SYNC 	• 5 GHz
InfiMAN Evolution E5-BSQ	 Integrated 90 deg sector beamforming antenna Sector throughput up to 800 Mbps Gigabit Ethernet interface & SFP & SYNC 	• 5 GHz
InfiMAN Evolution E-BSE	 External antenna Sector throughput up to 800 Mbps Gigabit Ethernet interface & SFP & SYNC 	5 GHz6 GHz
InfiMAN Evolution E-BSE-L	 External antenna Sector throughput up to 360 Mbps Gigabit Ethernet interface & SFP & SYNC 	• 5 GHz

InfiMAN Evolution Base Station Sectors







	E5-BSI E6-BSI	E5-BSQ	E5-BSE E6-BSE	E5-BSI-L	E5-BSE-L
Models		H 11			
5 GHz	16 dBi, 90° 27 dBm	21 dBi, 90° 25 dBm	2x type-N 27 dBm	16 dBi, 90° 27 dBm	2x type-N 27 dBm
6 GHz	16 dBi, 90° 25 dBm				
Capacity	Up to 800 Mbps, net			Up to 360	Mbps, net
Channel Widths	20/40/80 MHz			20/40) MHz
Modulation coding schemes	9 MCS – from BPSK 1/2 to QAM256 5/6				
Duplex scheme	TDD				
Ethernet	Gigabit Ethernet & SFP & SYNC				

InfiMAN Evolution Subscriber Terminals








	E5-ST18 E6-ST18	E5-ST23	E5-ST25 E6-ST25	E5-ST28 E6-ST28	E5-STE E6-STE
Models					
5 GHz	18 dBi 25 dBm	23 dBi 25 dBm	25 dBi 25 dBm	28 dBi 25 dBm	2x type-N 25 dBm
6 GHz	18 dBi 25 dBm		25 dBi 25 dBm	28 dBi 25 dBm	2x type-N 25 dBm
Capacity	20/50/670 Mbps, net (20/50/670 Mbps bitrate) – license upgradeable				
Channel Widths	20/40/80 MHz				
Modulation coding schemes	9 MCS – from BPSK 1/2 to QAM256 5/6				
Duplex scheme	TDD				
Ethernet	1x Gigabit Ethernet				

^{*} Roadmap item

InfiMONITOR



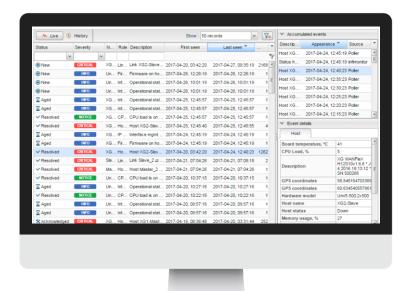

Key features

Host data

 Display of key parameters values in real time

Link data

 Ability to view detailed information about downlink and uplink streams

Incidents

- Display of events in the feed with priority and object for which the event was created
- Ability to assign individual rules for creating events for different groups of hosts
- Email notifications about events to the employees in charge

Charts

 Charts with different parameters for hosts and links within arbitrary period of time

Automatic discovery

 Automatic discovery and adding of hosts and links from the same MINT network

Management & Operations



Unit Level	Network Level
Web GUI	InfiMONITOR – monitoring system
 Device settings Detailed statistics and diagnostics data 	Display of the wireless network structure with metrics about hosts and links in real time on the network map
 Visual spectrum analysis, antenna alignment and throughput measurement 	 Creation of diagrams based on different parameters of hosts and links
 Maintenance: configuration/firmware upload/backup factory reset Secure access using HTTPS protocol 	 Automatic tracking of changes and creation of events according to the configured rules
	Email notifications to the employees in charge about critical events
	Lists of hosts and links with ability to view values of all parameters
Telnet/SSH	► Automatic discovery of hosts and
 In-depth configuration, diagnostics, monitoring and maintenance for advanced users, full functionality available 	connections between them using WANFleX OS features, which provide information on neighboring hosts

Radio Planning



InfiPLANNER


- Web-based PtP & PtMP estimation tool
- Key features:
 - Visual planning based on Google Maps integration
 - Complex radio propagation model ITU-R and Longley-Rice
 - Relief and Fresnel zone visualization
 - Throughput, link availability and expected modulation estimations
 - Detailed reporting
 - Assembling guide in PDF (PtP mode only)
- Available at http://infiplanner.infinetwireless.com

InfiPLANNER







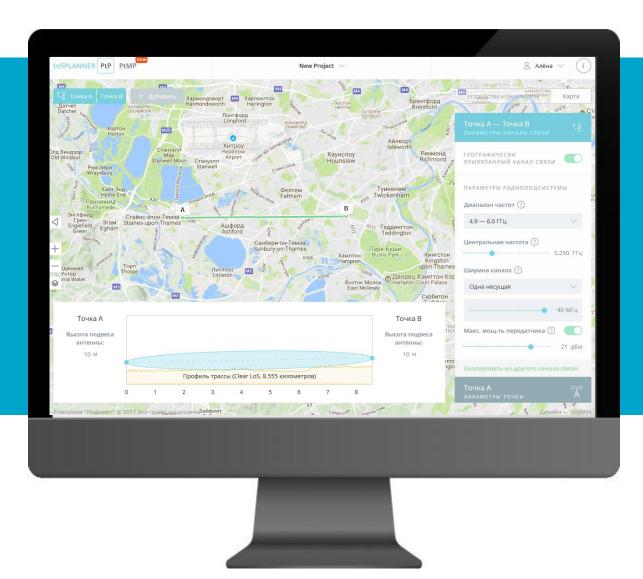




Point-to-Point

InfiPLANNER






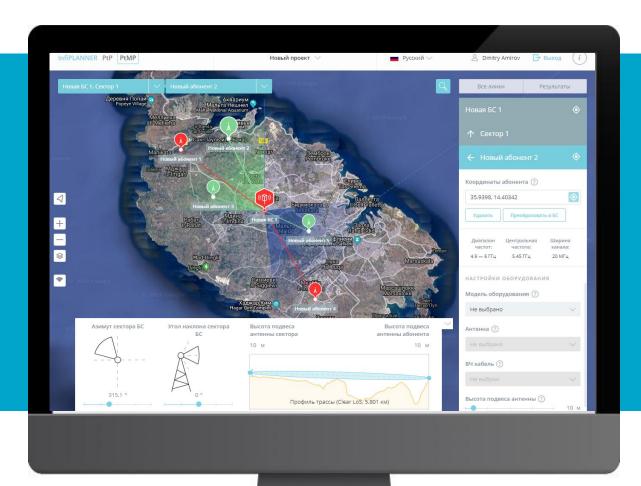









Requirements

- Data links for the telemetry systems deployed in production fields.
- Installation of multisector BS with coverage of up to 12km.
- High-speed links at a range of up to 40km.
- Redundancy of fibre-optic communication links.



Service types

- Telemetry.
- Voice.
- Data transfer.
- E1.

Implemented more than 800 Infinet units




Infinet solutions

- High-performance InfiLINK 2x2 links.
- 12 InfiMAN 2x2 base stations and 77 subscriber terminals.



Gazprom Neft, Russia





Requirements

- Connection to the network of fuel filling stations with InfiNet equipment.
- Data transfer rate of no less than 1-2 Mbps.



Service types

- Telephony.
- Video surveillance.
- Internet access.
- Wi-Fi.

Supplied more than 200 Infinet units



Infinet solutions

 Telephony, video surveillance system and broadband access for the largest gas fields, supported by Infinet equipment.

● ● ● TNK-BP, Russia

TNK-BP

Was Russia's third-largest oil producer and amongst the ten largest private oil companies in the world (in 2013 it was acquired by Russian oil company Rosneft).

Requirements

- 2,350 points of data from multiple-well platforms.
- Data transfer rate no less than 1-2 Mbps per terminal.
- BS coverage no less than 15 km.
- Operating in harsh climatic conditions.
- BS with high real throughput (up to 80 Mbps).



Service types

- VPN.
- Video surveillance.
- VoIP and video transfer.

Implemented 15 BS (62 sectors), BS coverage is up to 25 km.



Infinet solutions

Extended InfiLINK 2x2
 Point-to-Point and InfiMAN
 2x2 BS sector for
 connection of terminals in
 the oil fields.





Saudi Aramco, Saudi Arabia.

One of the largest oil producers in the world.



Requirements

- Point-to-Multipoint connection for dozens of remote oil wells. BS coverage of over 17 km.
- Point-to-Point links of up to 44 km for video surveillance and data transfer from the water storage of the Ministry of Water and Electricity.



Service types

- Internet access.
- VPN services.
- Video surveillance.

Implemented more than 200 Infinet units.



Infinet solutions

 InfiMAN 2x2 Point-to-Multipoint.









Outstanding solutions with the best performance



Thousands of successful deployments around the world



One of the world's
Top 5 FBWA equipment manufacturers



Product development in our own world-class laboratory



Universal solutions for various industry sectors

